

# Sharing to learn and learning to share; Fitting together Meta, Multi-Task, and Transfer Learning: A meta review

Richa Upadhyay<sup>1\*</sup>, Ronald Phlypo<sup>2</sup>, Rajkumar Saini<sup>1</sup>  
and Marcus Liwicki<sup>1</sup>

<sup>1</sup>Department of Computer Science, Electrical and Space  
Engineering, Embedded Intelligent Systems Lab,  
Luleå University of Technology, Luleå, 97187, Sweden.

<sup>2</sup>GIPSA-lab, Université Grenoble Alpes, CNRS, Grenoble INP,  
Grenoble, 38000, France.

\*Corresponding author(s). E-mail(s): [richa.upadhyay@ltu.se](mailto:richa.upadhyay@ltu.se);  
Contributing authors: [ronald.phlypo@gipsa-lab.grenoble-inp.fr](mailto:ronald.phlypo@gipsa-lab.grenoble-inp.fr);  
[rajkumar.saini@ltu.se](mailto:rajkumar.saini@ltu.se); [marcus.liwicki@ltu.se](mailto:marcus.liwicki@ltu.se);

## Abstract

Integrating knowledge across different domains is an essential feature of human learning. Learning paradigms such as transfer learning, meta learning, and multi-task learning reflect the human learning process by exploiting the prior knowledge for new tasks, encouraging faster learning and good generalization for new tasks. This article gives a detailed view of these learning paradigms and their comparative analysis. The weakness of one learning algorithm turns out to be a strength of another, and thus merging them is a prevalent trait in the literature. There are numerous research papers that focus on each of these learning paradigms separately and provide a comprehensive overview of them. However, this article provides a review of research studies that combine (two of) these learning algorithms. This survey describes how these techniques are combined to solve problems in many different fields of study, including computer vision, natural language processing, hyper-spectral imaging, and many more, in supervised setting only. As a result, the global generic learning network – an amalgamation of meta learning, transfer learning, and multi-task learning – is introduced here, along with some open research questions and future research directions in the multi-task setting.

**Keywords:** Multi-task learning, Meta learning, Transfer learning, Knowledge sharing, Heterogeneous tasks, multi-modal inputs, Generalization on unseen tasks

# 1 Introduction

Machine Learning (ML) continuously draws inspiration from human cognition and decision-making to develop more human-like, neurally-weighted algorithms (Fong et al (2017)). A state-of-the-art model and successful tool in computer vision is the Convolutional Neural Networks (CNNs), which is inspired by biological vision and neural activity. Traditional ML algorithms follow a single task learning approach wherein they are trained to solve only one task at a time. If there is a need to accomplish another task, then the network needs to be re-trained on a new dataset. Liu (2017) called this *isolated learning*. It does not utilize and preserve any prior information from the previous learning for a future task. However humans do not learn anything from scratch, and they can rapidly learn new concepts due to their inherent potential of seamlessly sharing the acquired knowledge across tasks. The more related the tasks, the easier it is to utilize the knowledge. For example, when learning to drive a car, the knowledge acquired while riding a bike or a motor-bike comes in useful. The transfer of prior knowledge enables humans to learn quickly and accurately in a few instances because humans have a bias that similar tasks have similar solutions (to some extent). Therefore, they acquire the concept by focusing on learning the differences between the features of the tasks. Some of the learning techniques in ML or Deep Learning (DL) such as transfer learning, meta learning, Multi-Task Learning (MTL), and lifelong learning, are inspired by such human capability, where the aim is to transfer the learning of one task to another task rather than training it from scratch.

## 1.1 What is a Task?

Before further discussing these information-sharing learning paradigms, it is vital to understand the definition of a *task*. Formally, a task can be defined as a piece of work performed to fulfill a purpose, formal definition of a task is discussed in Sec. 2.1. In this article, while discussing the learning paradigms, it should be noted that the task does not refer to the process of learning. In fact, learning helps to acquire the competence required to execute a task. The most common kinds of tasks performed by various ML or DL algorithms are classification, regression, segmentation, machine translation, anomaly detection, and dimension reduction. If two tasks are similar, e.g., both are classification tasks, then they are referred to as homogeneous tasks. However if they are different e.g., one is classification and the other is segmentation, then they are termed heterogeneous tasks.

Note that the terms task and domain are considered different in this article. When there is only one task over each domain, researchers interchangeably use these terms. However, in this article, domain refers to the data distribution from which the training or test data are sampled, the exact definition in Sec. 2.1. It is possible to have multiple similar types or diverse tasks over a domain. Overall, the tasks can be categorized depending on the labels or ground truth in the case of supervised learning, whereas the domain is related to the feature space of the data.

## 1.2 Knowledge transfer in machine learning algorithms

Learning one task at a time; is a generic approach in the field of ML. Big problems are disassociated into smaller independent tasks that are learned distinctly, and combined results are presented. Caruana (1993) introduced MTL, wherein proposing that to achieve better performance, all tasks should be trained simultaneously. The underlying concept is that if all the smaller tasks share their learning, then they may find it easier to learn rather than learning in isolation. This idea of *Multi-task learning* is very similar to the human vision system. For example, while looking at a scene, the brain is not only able to identify objects. Indeed, it can also segment them, understand them, identify people, classify the weather, and several other things from a single visual. In ML classification, segmentation, identification, etc., are independent tasks, but MTL proposes accomplishing all these tasks jointly by exploiting the fact that in the above example, from the task point of view, these are non-identical but closely related tasks, i.e., segmentation of a human from a non-human in the picture further aid in identifying the person.

Similarly, learning a complex task such as riding a bike relies on motor skills that a human develops when they learn to walk as a baby. The task is therefore learned by integrating a considerable amount of prior knowledge across tasks. Additionally, while learning generalized concepts across many tasks, humans evolve the ability to learn quickly and in fewer instances. These concepts are the bedrock for *transfer learning*, *lifelong learning*, and *meta learning*. The approach to introducing prior knowledge while training makes these learning algorithms mutually distinct.

## 1.3 Scope of this work

The emphasis of this article is on learning algorithms that use previously learned knowledge while learning an unseen but related task. Three learning paradigms are discussed: multi-task learning, meta-learning, and transfer learning. Other related learning algorithms such as Lifelong Learning (LL), online learning, and Reinforcement Learning (RL) are not within this work's scope because their fundamental objective is slightly different, i.e., the progressive learning process. Additionally, reinforcement learning and online learning are restricted to single task learning only, while the others involve multiple tasks. LL has the key characteristics of consistent knowledge accumulation

across several tasks and reusing it while learning a new task which makes it closely related to meta learning. However, the system architecture of LL (Chen et al (2018)) is fundamentally different from the other learning paradigms: it may require an ensemble of many learning algorithms and various knowledge representation methods. To evaluate LL, many tasks and datasets are required to review the algorithm's performance, while learning the sequence of tasks is of great significance. Given these differences, LL is excluded from this study.

Although this paper provides an in-depth explanation of multitask, meta and transfer learning, it *does not* discuss the literature devoted exclusively to these algorithms. This is due to the fact that the central purpose of this work is to talk about the research articles that focus on combining these learning paradigms. Numerous scholarly articles provide a comprehensive survey of these distinct algorithms and discuss recent developments in the relevant fields, like Crawshaw (2020); Ruder (2017); Zhang and Yang (2018); Vandenhende et al (2021); Thung and Wee (2018); Chen et al (2021) discuss MTL, Hospedales et al (2020); Peng (2020); Luo et al (2022); Lee et al (2022) gives survey on meta learning algorithms, and Zhuang et al (2021); Arnold et al (2007); Weiss et al (2016); Pan et al (2010); Niu et al (2020); Nguyen et al (2022) review transfer learning. The fact that there is no such comprehensive review of works that have combined these learning algorithms is the motivation behind our presentation of a survey of research papers that fall under this category.

## 1.4 Types of knowledge transfer

Information sharing between different tasks can result in two types of knowledge transfers: positive and negative (Crawshaw (2020); Zhang et al (2021)). Positive transfer occurs when the information shared between the tasks aids in improving the performance of the tasks, while negative transfer occurs when the performance of the tasks suffers due to information flow within the tasks. Negative transfer is also known as destructive interference; it occurs because possibly even related tasks may have contradictory requirements. When these are in a knowledge sharing setting, improving the performance of one task may hinder the performance of another. Negative transfer is a significant issue in multiple task learning concepts such as transfer learning, MTL, etc. To support positive transfer, it is important for an algorithm to fulfill two complementary objectives: retain task-specific knowledge and better generalization across tasks. Accomplishing such goals is not that straightforward; consequently, this is an active area of research.

## 1.5 Contribution

The following are the important contributions of this work.

- An outline of the three learning algorithms, i.e., transfer learning, MTL, and meta learning, together with a comparative study of these learning paradigms focusing on their strengths and weaknesses.

- A detailed survey of the current research in multi-task meta learning, meta transfer learning, and multi-task transfer learning. This article highlights instances in the literature where these algorithms are frequently misunderstood as similar or derivatives of one another due to the misuse of terminology.
- This article proposes a generic learning network, a method for combining these three learning paradigms in a way that allows for the use of all three learning algorithms, combinations of two, or just one of them as needed.
- This work discusses open questions related to knowledge sharing in ensemble of MTL, meta learning and transfer learning.

## 1.6 Notations used in this article

Before moving to the next section it is important to know some of the notations used in this article. These are:

- Variables in calligraphic ( $\mathcal{D}, \mathcal{X}, \mathcal{Y}$ ) - sample space
- Variables in italics ( $D, x, y$ ) - one sample of the space
- $p_i$  - joint distribution of  $i$  over the space
- $p(A)$  - marginal probability distribution of A
- $p(A | B)$  - conditional probability distribution of event A given B

## 1.7 Structure

The structure of the article is as follows: Sec. 2 gives the definitions and fundamentals of the learning paradigms along with examples and a comparative study. A detailed literature study of the learning algorithms when used together is presented in Sec. 3. Sec. 4 explains the reason for fusing these algorithms and introduces a global learning network. Finally Sec. 5 concludes the article with some open questions and directions for future research.

# 2 Learning paradigms

This section elaborates on three learning paradigms highlighted in this article: transfer learning, MTL, and meta learning. In addition to a detailed definition, a comparison of these algorithms is provided below. However, this is preceded by a discussion of conventional supervised learning and its limitations, which explain the need for an information sharing algorithm.

## 2.1 Supervised Learning

The objective of ML algorithms is to learn from experiences. Here learning refers to improving by experience at a particular task (Mitchell (1997)). In supervised learning, which is one of the primary categories of ML algorithms, these experiences happen to be labeled datasets, wherein the algorithm is fed with the inputs and the expected output, and the goal is to learn a mapping from the input to the output. This article discusses the various knowledge transferring learning algorithms in the supervised sense only.

## Definitions

*Domain ( $\mathcal{D}$ )* – can be defined as a combination of the input feature space  $\mathcal{X}$ , and an associated probability distribution  $p(x, y)$ , i.e.,  $\mathcal{D} = \{\mathcal{X}, p(x, y)\}$ . Here  $p(x, y)$  represents the joint probability distribution over the feature-label space, and can be decomposed into  $p(x, y) = p(x)p(y | x)$  or  $p(x, y) = p(y)p(x | y)$ , where  $p(\cdot)$  is the marginal distribution and  $p(\cdot | \cdot)$  is the conditional distribution. The joint probability is used because the learning algorithms implicitly assume that each instance or sample  $(x_i, y_i)$  is drawn from a joint distribution.

*Dataset ( $D$ )* – In the supervised setting dataset  $D$  consists of input-output pairs, i.e.,  $D = \{(x_i, y_i)_{i=1}^n\}$ , where  $x_i$  is an  $m$ -dimensional feature vector and  $y_i$  is the response or output variable which can be either a categorical variable or a real-valued scalar, and  $n$  is the number of labelled samples.

*Task ( $T$ )* – A loss function  $\mathcal{L}$  and a dataset  $D$  can be used to define a task. i.e.,  $T = \{\mathcal{L}, D\}$  (Hospedales et al (2020)). There can be one task  $T$  or a set of  $n$  tasks  $\mathcal{T} = \{T_1, T_2, \dots, T_n\}$  over a domain  $\mathcal{D}$

*Supervised learning* – for a specific domain  $\mathcal{D} = \{\mathcal{X}, p(x, y)\}$ , the aim is to learn a predictive function  $\mathcal{F}_\theta(x)$  from the training data  $\{(x_i, y_i)_{i=1}^n\}$ , where  $x_i \in \mathcal{X}$  and  $y_i \in \mathcal{Y}$  i.e., the output label space, and  $\theta$  are the function parameters. From a probabilistic point of view,  $\mathcal{F}_\theta(x)$  can also be considered as the conditional probability distribution  $p(y | x)$ . In the case of a classification task, when the response variable  $y$  is categorical, i.e.,  $y \in \{1, \dots, C\}$ , and  $C$  is the number of categories, supervised learning aims to predict;

$$\hat{y} = \mathcal{F}_\theta(x) = \arg \max_{c \in [1, C]} p(y = c | x) \quad (1)$$

This is known as Maximum A Posteriori (MAP), i.e., the most probable class label.

Defining the objective of supervised learning from the task point of view. The loss function  $L$ , is a function of the model prediction i.e.,  $\hat{y} = \mathcal{F}_\theta(x)$  and true labels  $y$  i.e.,  $L = \sum_{i=1}^N f(\hat{y}_i, y_i)$ , for dataset  $D = \{(x_1, y_1), \dots, (x_N, y_N)\}$ . In a supervised learning setting, for any task  $T$  the objective is to optimize the parameters  $\theta$  so that the loss is minimum. It can be expressed as –

$$\theta = \arg \min_{\theta} \mathcal{L}(D; \theta) \quad (2)$$

Based on the above explanation, many a times as described by Zhuang et al (2021) a task  $T$  can be also defined as a combination of the label space  $\mathcal{Y}$  and the predictive function  $\mathcal{F}_\theta(x)$  i.e.,  $T = \{\mathcal{Y}, \mathcal{F}_\theta(x)\} = \{\mathcal{Y}, p(y | x)\}$ . Therefore for two tasks to be different, either the label space  $\mathcal{Y}$  or the conditional probability distributions  $p(y | x)$  must differ.

In conventional supervised learning, it is assumed to solve one task i.e., using one dataset over a domain, and so, the dataset is divided into development and test sets. Here the test set represents the future unseen data, but

both the sets are drawn from the same distribution and both are labeled. But in reality, such a dataset is difficult to find, and therefore the supervised learning algorithm fails to generalize. For example, a model is trained using the handwritten digits dataset but is further used for inference on license plate images to detect the numbers automatically. Therefore, for the model to perform on the data from another distribution, it needs to be trained again from the beginning using the new data. This sudden loss of previously learned information, when information pertinent to a new task is introduced is commonly known as catastrophic forgetting (Hasselmo (2017)). This is one of the problems in traditional supervised learning, and is said to be overcome in learning algorithms such as transfer learning, MTL, meta learning, and lifelong learning by sharing information between tasks.

## 2.2 Transfer Learning

Most ML models work under the assumption that the training and testing data are drawn from the same distribution (domain). If the distribution is changed, then the model needs to be trained again from scratch. Transfer learning helps to overcome this issue. Transfer learning refers to exploiting what has already been learned in one setting to improve the learning in another setting (Goodfellow et al (2016)). Information transfer occurs from the source task (transferring knowledge to other tasks) to the target task (use knowledge from other tasks). The domain of the source task and the target task may or may not be the same.

Assume only one source domain  $\mathcal{D}_s = \{\mathcal{X}_s, p_s\}$  and target domain  $\mathcal{D}_t = \{\mathcal{X}_t, p_t\}$  where  $p_s$  and  $p_t$  are the joint distributions of the source and target data, respectively. Let source data be  $D_s = \{(x_{s_i}, y_{s_i})_{i=1}^{n_s}\}$ , where  $x_{s_i} \in \mathcal{X}_s$  and  $y_{s_i} \in \mathcal{Y}_s$  are the data instances and associated labels respectively. Similarly let the target data be  $D_t = \{(x_{t_i}, y_{t_i})_{i=1}^{n_t}\}$ , where  $x_{t_i} \in \mathcal{X}_t$  and  $y_{t_i} \in \mathcal{Y}_t$ . Usually in transfer learning it is considered that  $0 \leq n_t \ll n_s$  i.e., the source data is much larger than the target data. Consider,  $T_s$  and  $T_t$  to be the source and target tasks in their respective domains.

Definition of transfer learning, as discussed by Pan et al (2010):

For a given source domain  $\mathcal{D}_s$  and source task  $T_s$ , a target domain  $\mathcal{D}_t$  and target task  $T_t$ , with  $\mathcal{D}_s \neq \mathcal{D}_t$  or  $T_s \neq T_t$ , transfer learning aims to learn the target task  $T_t$  i.e., improve the learning of the target prediction function  $\mathcal{F}_{\theta_t}(x_t)$  in domain  $\mathcal{D}_t$  using the knowledge gained by performing a source task  $T_s$  in domain  $\mathcal{D}_s$ . The task in the source domain is to learn the source predictive function  $\mathcal{F}_{\theta_s}(x_s)$  from the training data  $D_s$ . Additionally, the dataset  $D_s$  is not accessed during transfer.

In other words, it is solving target task  $T_t$  after solving the source task  $T_s$ , by handing over the knowledge learnt during task  $T_s$ .

In order to perform transfer learning, either of the two conditions in the definition should be satisfied. Since  $\mathcal{D} = \{\mathcal{X}, P(X)\}$ , the condition  $\mathcal{D}_s \neq \mathcal{D}_t$  suggests that either  $\mathcal{X}_s \neq \mathcal{X}_t$  i.e., the feature space of the domains are different

or  $p_s(x) \neq p_t(x)$  which means even if the feature space are same, the marginal probability distribution of the source and target domain data are different. Furthermore, as a task is defined as  $\mathcal{T} = \{\mathcal{Y}, p(y | x)\}$ , the condition  $\mathcal{T}_s \neq \mathcal{T}_t$  implies that either the label space of both the domains are different i.e.,  $\mathcal{Y}_s \neq \mathcal{Y}_t$  or the conditional probability distributions are different i.e.,  $p(y_s | x_s) \neq p(y_t | x_t)$ . Based on these conditions, transfer learning can be classified as follows;

- Inductive transfer learning - in this  $\mathcal{Y}_s \neq \mathcal{Y}_t$ , and it does not matter whether the source and target input feature space are the same. Labeled data in the target domain are needed to learn an predictive model, which was already trained in the source domain. Here, there are two possibilities depending on the labels;
  1. *The source domain has a lot of labeled data*; according to [Pan et al \(2010\)](#) this is considered as a limiting case of Multi-task learning ([Caruana \(1997\)](#)) (discussed in section 2.3). But there is a difference, inductive transfer learning shares the knowledge of the source task to improve the learning of only the target task, while multi-task learning jointly learns both the task and attempts to improve the performance of both.
  2. *The source domain has no labeled data*; this converges to Self-taught learning ([Raina et al \(2007\)](#)). In the case of unlabelled data, the source task learns a good feature representation and uses these learned feature representations to accomplish the target task.
- Transductive transfer learning ([Arnold et al \(2007\)](#)) - in this  $\mathcal{Y}_s = \mathcal{Y}_t$  but  $\mathcal{X}_s \neq \mathcal{X}_t$ , and it is assumed that the target domain has unlabelled data at the time of training. There are two cases-
  1.  $\mathcal{X}_s \neq \mathcal{X}_t$  i.e., feature space is different
  2.  $\mathcal{X}_s = \mathcal{X}_t$ , but  $p_s(x) \neq p_t(x)$  i.e., the marginal probability distribution is different for both the domains. This case is related to domain adaptation ([Farahani et al \(2020\)](#)). Furthermore, covariance shift is a condition in domain adaptation when along with  $p_s(x) \neq p_t(x)$ , the conditional distributions are constant  $p_s(y | x) = p_t(y | x)$ . Data drift or concept shift is the case when  $p_s(x) = p_t(x)$ , while  $p_s(y | x) \neq p_t(y | x)$ . These are the types of domain shifts explained by [Farahani et al \(2020\)](#).
- Unsupervised transfer learning - there is no labeled data in either domain and the aim is to solve unsupervised learning tasks in the target domain, for example, clustering, dimension reduction etc. using a large amount of data in the source domain. Self-taught clustering ([Dai et al \(2008\)](#)) is one such instance of unsupervised transfer learning.

There are two primary approaches for transferring information between source and target tasks. The first is feature extraction, which uses the source model architecture and model parameters to extract good data features from




the target domain to accomplish the target task. The second approach is fine-tuning; similar to the feature extraction, the source model shares its parameters and architecture with the target task, but the source parameters only serve as initialization to the target network, and further training is required using the target domain data. Very often, only the higher (last) layers of the network are modified and trained, i.e., the parameters are altered to adapt to the new data, while the parameters of the lower (initial) layers are frozen, i.e., the same as those from the source model. The pre-trained source model is said to be fine-tuned according to the target data and fine-tuning helps to improve generalization and faster training when compared to training the target task from scratch.

## Example of transfer learning

Consider a classification task of identifying cats from dogs as the target task, with limited training data. In addition a source task, identifies breeds of dogs having a larger dataset than the target task. Since conventional supervised machine learning models are data-hungry, it is difficult to accomplish the target task with less data, assuming that the source task with more data than the target performs sufficiently well. In this scenario, knowledge transfer from the source to the target, if performed effectively, may enhance the performance of the target task. A common approach to knowledge transfer is using the model as well as the parameters of the source to extract features of the target data and appending a classifier, which will learn to classify the images of dogs and cats.

## 2.3 Multi-task Learning

MTL as explained by [Caruana \(1997\)](#), is an inductive transfer approach that exploits the domain information in the training data of related tasks as inductive bias to improve the generalization of all tasks. The underlying theory of MTL is, that the information gained while learning one task can help the other task learn better. In MTL all tasks are trained (or learned) together, [Maurer et al \(2016\)](#) explained that shared representations significantly improve the performance of the tasks compared to learning tasks individually.

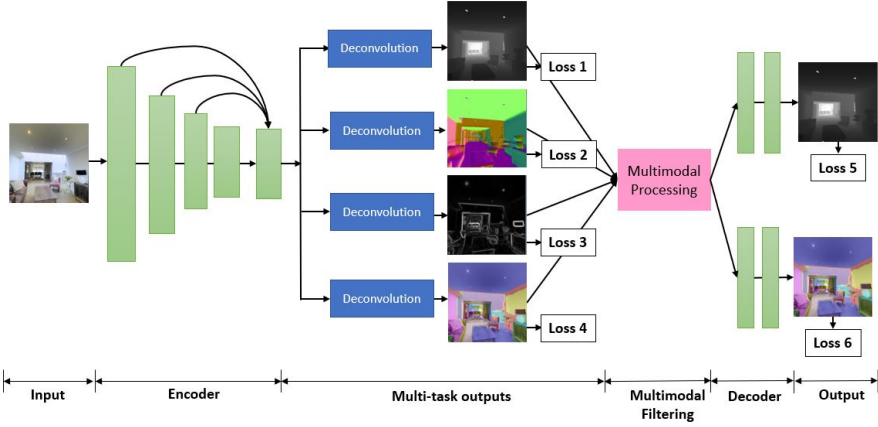

**Fig. 1:** Illustration of PAD-Net architecture proposed by [Xu et al \(2018\)](#), with four primary tasks monocular depth estimation, semantic segmentation, finding surface normal and contour prediction. Outputs are integrated to predict of two output tasks of depth estimation and scene parsing. Here ,Loss 1 - Loss 6 represent optimization losses for various tasks. All images in the figure are from Taskonomy dataset. ([Zamir et al \(2018\)](#))

Definition of MTL, as discussed by [Chen et al \(2018\)](#):

Consider,  $\mathcal{T}$  is an ensemble of  $N$  related but not identical tasks i.e.,  $\mathcal{T} = \{T_1, T_2, \dots, T_N\}$  over a domain  $\mathcal{D}$  and each task  $T_i \in \mathcal{T}$  has training data  $D_i^{tr} = \{(x_i^{tr}, y_i^{tr})_1, (x_i^{tr}, y_i^{tr})_2, \dots, (x_i^{tr}, y_i^{tr})_{m_i}\}$ , where  $m_i$  is the number of data instances for  $i^{th}$  task.. MTL aims to jointly learn these multiple tasks  $\{T_1, T_2, \dots, T_N\}$  in order to maximize the performance of all the  $N$  tasks. So, the objective of MTL is to learn the optimal parameters  $\theta^*$ , in order to minimize the combined loss  $\mathcal{L}$  across each task. It can be expressed as:

$$\theta^* = \min_{\theta \in \Theta = \bigcup_{i=1}^N \Theta_i} \sum_{i=1}^N \mathcal{L}_i(\theta_i, D_i^{tr}) \quad (3)$$

Here,  $\mathcal{L}_i$  and  $\Theta_i$  represent loss and parameters for  $i^{th}$  task.

As discussed in section 1.4, in multi-task arrangement despite the tasks being related, negative transfer can exist. This depends on the information sharing between the tasks and can be controlled by better MTL architecture designs and task relationship learning. In recent years there has been significant research on creating shared architectures for MTL. [Crawshaw \(2020\)](#) surveyed common deep MTL architectures used in computer vision, natural language processing, reinforcement learning, etc. Deep MTL architectures can be divided into two types of modules ([Goodfellow et al \(2016\)](#)):

**Generic modules:** These are shared across all tasks, and the parameters benefit from the data of all tasks (corresponding to  $\Theta_g = \bigcap_i \Theta_i$ );

**Task-specific modules:** These are dedicated modules for each task and the parameters benefit from the instances of the particular task (corresponding to  $\Theta_i - \Theta_g$ ).

Note, that in this context modules are combinations of layers of neural networks or the Convolutional Neural Network (CNN). As a result of these modules, the parameters are divided into shared parameters and task specific parameters. The best performance of MTL models is achieved only when there is balanced sharing, because too much sharing can cause negative transfer and too little sharing can inhibit the effective leveraging of information between tasks. Therefore, to create an effective MTL architecture, it is important to analyze how to combine the shared modules (layers) and task specific modules and what portion of the model's parameters is shared between tasks. In conventional MTL, the parameter sharing approach is classified as (Crawshaw (2020))-

- *hard parameter sharing* - model weights (or parameters) are shared between multiple tasks and each weight is modified to minimize multiple loss functions. This can be achieved as a result of MTL architectures.
- *soft parameter sharing* - tasks have separate weights, and the distance between the weights of the models for every task added to the joint loss function is minimized, similar to introducing a regularization term in the combined loss. Therefore, there is no explicit sharing of parameters; rather, models of different tasks are forced to have similar parameters. This is often introduced when there is negative transfer between the task and the need to share less. The various optimization techniques help to achieve soft parameter sharing.

## Example of MTL

Consider a dataset with images of natural scenes. Every image is labelled for a number of tasks such as scene classification, semantic segmentation, instance segmentation and pixel wise depth values for depth estimation. For conventional machine learning, all four are different tasks, and it is required to train different models for each of the problems. MTL, however, exploits the fact that all the tasks are related and use the same input image. Therefore, they can be trained together in an MTL architecture, so that they share the representations between tasks and encourage the model to generalize better than single task learning. A similar architecture was proposed by Xu et al (2018) in Fig .1. Usually, in MTL, it is believed that there is one main task, and the rest are auxiliary tasks that only contribute to improving the performance of the main task. In this article, there is no such assumption for main and auxiliary tasks. Furthermore, in the above example, additional tasks such as learning image compression and decompression, colorization of grayscale images, denoising of images, etc., can also be integrated into the architecture.

## 2.4 Meta Learning

Meta Learning better known as “*Learning to learn*” (Thrun and Pratt (1998); Baxter (1998)), is a learning paradigm that aims to improve the learning of new tasks with lesser data and computation, by exploiting the experience gained over multiple training episodes for various tasks. The conventional ML algorithm employs multiple data instances for better model predictions, while meta learning uses multiple learning instances to improve the performance of a learning algorithm.

Meta learning can be defined as:

Assuming a set of  $M$  source tasks  $\mathcal{T}_s = \{T_{s_1}, T_{s_2}, \dots, T_{s_M}\}$ , sampled from a distribution  $p(\mathcal{T})$ , with source datasets  $D_s$ . And  $Q$  target tasks  $\mathcal{T}_t = \{T_{t_1}, T_{t_2}, \dots, T_{t_Q}\}$  with target datasets  $D_t$ . Meta learning is to train a model on the  $M$  source tasks using data  $D_s$ , such that it generalizes well on a new unseen target task, which leads to:

- Computational efficiency - faster training of the target task using data  $D_t^{train}$
- Data efficiency - good training with less target data instances
- Effective knowledge transfer - good performance on the target test data  $D_t^{test}$

Note - The source and target tasks in conventional meta learning are in the same domain (Finn et al (2017)), though there are some works that focus on domain generalization in which the domains for the source and target tasks and domains can be different (Li et al (2018); Qiu et al (2021); Triantafillou et al (2019)).

Let a task  $T$  be defined as,  $T = \{\mathcal{L}, D\}$ , where  $D = \{(x_1, y_1), \dots, (x_N, y_N)\}$  is training dataset and  $\mathcal{L}$  is the loss function. For a single task conventional supervised ML algorithm, the aim of learning a model  $\hat{y} = f_\theta(x)$  parameterized by  $\theta$ , is accomplished by solving (same as Eq. 2):

$$\theta^*(T) = \arg \min_{\theta} \mathcal{L}(D; \theta, \phi) \quad (4)$$

Here  $\phi$  denotes the “how to learn” assumptions (Hospedales et al (2020)), for example the optimizer for  $\theta$ , choice of hyper-parameters, etc. A pre-specified  $\phi$  can help to achieve significant performance as compared to the case when it is absent.

Meta learning involves learning a generic algorithm by training over several tasks, that enables each new task to learn better than the previous. Therefore, for a distribution of task  $p(\mathcal{T})$ , meta learning becomes:

$$\min_{\phi} \mathbb{E}_{T \sim p(\mathcal{T})} \mathcal{L}(D; \theta^*(T), \phi) \quad (5)$$

Where  $\mathcal{L}(D; \theta^*(T), \phi)$  evaluates the model's performance trained using  $\phi$  on task  $T$ .  $\theta^*(T)$  is the optimal parameter learnt for task  $T$ . Here the parameter  $\phi$  is the *meta knowledge* or across task knowledge (Hospedales et al (2020)).

To solve the meta learning problem, assuming  $M$  source tasks  $\mathcal{T}_s$  sampled from  $p(\mathcal{T})$ , having dataset  $D_s = \{(D_s^{train}, D_s^{val})^{(1)}, \dots, (D_s^{train}, D_s^{val})^{(M)}\}$ , with train (support) and validation (query) sets. Also,  $Q$  target tasks with data  $D_t = \{(D_t^{train}, D_t^{test})^{(1)}, \dots, (D_t^{train}, D_t^{test})^{(Q)}\}$ , i.e., each task with train and test set. In the meta learning taxonomy, these tasks (both source and target tasks) are frequently referred to as learning episodes (Hospedales et al (2020)).

The meta learning objective in eq.[5] is obtained in two stages,

**Meta training** - The meta training stage can be posed as a bi-level optimization problem, where one optimization contains another optimization as a constraint. Here an inner learning algorithm solves a task, defined by dataset  $D_s^{train(i)}$  and objective function  $\mathcal{L}^{task}$ . While in meta training an outer (meta) algorithm updates the inner algorithm in order to improve the outer objective  $\mathcal{L}^{meta}$ . So, meta training can be formulated as:  
(outer Objective)

$$\phi^* = \arg \min_{\phi} \mathbb{E}_{\mathcal{T}_s \sim p(\mathcal{T})} \mathcal{L}^{meta}(\theta^{*(i)}(\phi), \phi, D_s^{val(i)}) \quad (6)$$

Where,  
(inner objective)


$$\theta^{*(i)}(\phi) = \arg \min_{\theta} \mathcal{L}^{task}(\theta, \phi, D_s^{train(i)}) \quad (7)$$

$\phi^*$  has all the information of source tasks (or data) to solve new tasks. So, the inner objective corresponds to task specific learning, while the outer objective corresponds to multiple task learning.

**Meta testing** - The meta testing stage is often referred as *adaptation* stage. This stage uses the meta knowledge or meta parameters ( $\phi^*$ ), to train the model on unseen target tasks. For an  $i^{\text{th}}$  target task, meta testing involves training on the  $D_t^{train(i)}$  to minimize the loss  $\mathcal{L}^{test}$  and evaluating the performance on  $D_t^{test(i)}$ , for optimal parameter  $\theta^{*(i)}$  given by:

$$\theta^{*(i)} = \arg \min_{\theta} \mathcal{L}^{test}(\theta, \phi_*, D_t^{train(i)}) \quad (8)$$

However, MTL can conceptually be seen as a special case of meta learning if  $\theta = \phi$  in the meta training phase, as there will be only one optimization objective and multiple tasks for training. Despite this similarity, there are many differences that persists between meta learning and MTL which are discussed in Sec. 2.5.

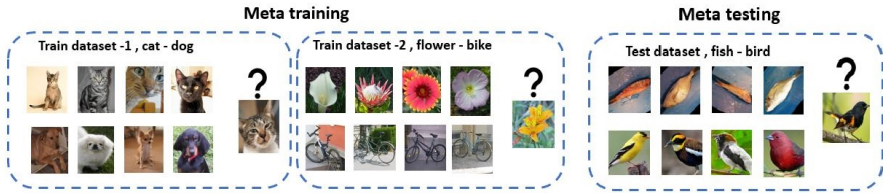

**Fig. 2:** An example of meta learning illustrating 4 shot 2 class image classification

## Example of meta learning


Fig. 2, shows an example of meta learning, where the source tasks are: Task 1- classification between cats and dogs, and Task 2- classifying flowers from bikes. The target task is to classify between images of fish and bird which the model has not seen during the meta training phase. This is a classic example of 4 shot 2 class image classification, where the objective is to learn to identify the categories only by 4 images and every tasks has 2 classes or labels. So, meta learning enables the model to learn fast in a few instances of fish and bird images during meta testing by utilizing the meta knowledge gained from meta training of the source tasks. The number of source tasks can be increased in order to achieve better generalization.

## 2.5 Comparisons

All three learning paradigms, as described in Sec. 2, communicate knowledge between tasks, but the differences reside in the specifics of when, how, and what is shared. As an additional distinction, the way in which tasks are introduced varies throughout the various learning paradigms. Fig. 3 depicts a summary of comparison of these learning paradigms, on the basis of the tasks and their domains, throughout the training and testing stages. It is important to highlight that in Fig. 3, the source and target domains in transfer learning and meta learning are believed to be distinct in order to simplify the process of comprehension. According to the definitions in Sec. 2, domains can be similar, but in that case the source and target tasks must be distinct. Consequently, Fig 3 illustrates the case when the source and target domains and tasks both are distinguishable. This section presents a comparative view of the MTL, meta learning and transfer learning. It might not cover all the differences but does focus on significant dissimilarities and also similarities.

## Transfer learning and MTL

The tasks involved in transfer learning and MTL can be heterogeneous, i.e., the nature of the tasks can be different such as classification, segmentation, and regression. These learning paradigms can share features and parameters between tasks. Because of the inductive transfer approach, MTL is also considered a type of transfer learning (Pan et al (2010)), but they are very different.

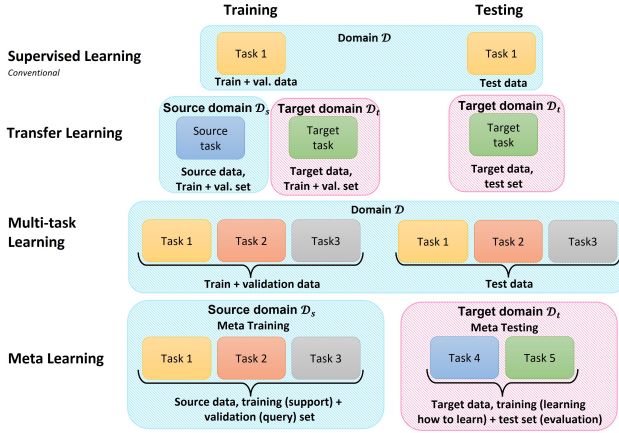

**Fig. 3:** A comparative representation of the learning paradigms

MTL learns many tasks together, while this is not the case in transfer learning, where the source task is trained, and the information is transferred for learning the target task. In other words, training tasks in transfer learning are sequential, while in MTL, tasks are usually trained simultaneously (or jointly). In MTL, the goal is to generalize the performance of all tasks, while in transfer learning, the focus is only on the generalization of the target domain. Transfer learning is a logical explanation for multi-task learning but not vice versa.

## Meta learning and Transfer learning

In both of these learning paradigms, the target tasks are trained after the successful training and testing of the source task, i.e., sequentially. Both algorithms aim to achieve better generalization on the target task. The key difference between them lies in the optimization algorithm. In transfer learning there is no meta objective when deriving priors (parameters) from learning the source task. In contrast, in meta learning the priors are extracted as a result of the outer optimization and these are evaluated while learning a new task. Only model parameters are shared in transfer learning, while meta learning transfers a variety of meta representations. In few shot learning applications of meta learning the meta training (source) and meta testing (target) conditions must match, e.g., if the source tasks are binary classification problems, then the target task necessarily should be binary classification. In contrast, transfer learning is possible on diverse tasks. In addition, meta learning supports multiple input modalities, whereas transfer learning requires source and target tasks to have the same input mode.

## Meta learning and Multi-task learning


Similar to transfer learning, MTL has single level optimization, i.e., no meta objective. MTL aims to solve fixed number of known tasks jointly, whereas

**Table 1:** Summary of significant strength and limitations

Paradigms	Strengths	Limitations
<b>Multi-task learning</b>	<ul style="list-style-type: none"> <li>- Can handle heterogeneous tasks and multi-modal inputs</li> <li>- Aim is to enhance performance of all tasks</li> </ul>	<ul style="list-style-type: none"> <li>- Requires comparatively large dataset for training</li> <li>- On adding a new task have to retrain the network, as it may require architectural changes</li> </ul>
<b>Meta learning</b>	<ul style="list-style-type: none"> <li>- Easy addition (or adaptation) of new tasks</li> <li>- Less training data required for a new unseen task</li> <li>- Robust generalization across tasks, and domains (if, source domain <math>\neq</math> target domain)</li> <li>- Can handle multi-modal inputs</li> </ul>	<ul style="list-style-type: none"> <li>- Focuses on enhancing performance of unseen (target) task</li> <li>- Source and target tasks must match (usually in case of few shot learning applications)</li> <li>- Gradient based meta learning algorithms such as Finn et al (2017) can be computationally expensive</li> </ul>
<b>Transfer learning</b>	<ul style="list-style-type: none"> <li>- Less training data required for target task</li> <li>- Good for feature extraction</li> <li>- Source and target tasks need not be identical</li> </ul>	<ul style="list-style-type: none"> <li>- Pretrained models tend to overfit on target task</li> <li>- All target tasks may not require complex source models with millions of parameters</li> <li>- Focuses on enhancing performance of target task</li> <li>- Modality of source and target task should be same</li> </ul>

meta learning address solving unseen tasks. Meta learning, as discussed earlier, only works with homogeneous tasks during meta training and testing. There is a great deal of research in the field of multi-modal meta-learning (Ma et al (2022)), but it is distinct from the application of meta-learning to non-homogeneous tasks, as the former focuses on diverse inputs and the latter on diverse tasks. Simultaneously, MTL can handle heterogeneous tasks and also a variety of inputs. The source tasks are trained sequentially for many iterations during meta training in meta learning. A new unseen task is learned



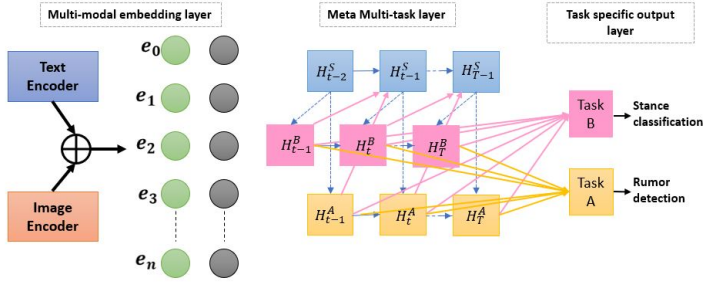

**Fig. 4:** A multi-modal meta MTL framework proposed by [Zhang et al \(2021\)](#) for rumor detection in social media.

at the time of meta testing; in contrast, in MTL, the training and testing are jointly performed for all tasks. Therefore, the knowledge is shared between the tasks at the time of training in MTL, but for meta learning, the model saves the prior knowledge from the source tasks to be used during meta testing the target tasks.

### 3 Ensemble of the learning paradigms

The strength and weaknesses of the learning paradigms detailed in Sec. 2 are summarized in Table. 1. Each algorithm has some drawbacks, which are overcome by another learning algorithm. For example, meta learning supporting homogeneous tasks only, while MTL may integrate heterogeneous tasks and multimodal inputs. Introducing a new task is much simpler in meta learning and transfer learning than MTL. For these reasons, these algorithms are coupled together in the literature to utilize their best features. This section discusses the research performed in various ensembles of these algorithms.

#### 3.1 Research in Multi-task meta learning

Insights from both meta learning and multitask learning can be fused to achieve the best of both worlds, i.e., efficient training of multiple heterogeneous tasks, a feature of MTL, and quickly adapting new tasks, a characteristic of meta learning. Thus providing a quick, effective, and adaptable learning mechanism. Numerous studies have demonstrated the effectiveness of combining both of these learning methods.

The article by [Chen et al \(2018\)](#) proposed a function level information sharing scheme for MTL, with a meta Long Short-Term Memory (LSTM) i.e., shared across all tasks and a basic LSTM which is task specific. The parameters are generated depending on the current factors by the meta LSTM. Here the meta LSTM is considered the prior knowledge while the basic LSTM is observed as the posterior knowledge. This method focuses on two Natural Language Processing (NLP) tasks, i.e., text classification and sequence tagging. Overall the architecture they propose is a multitask architecture, and employ

the two level optimization scheme is from meta learning. However, the performance is not evaluated for an unseen task. Nevertheless, they showed that the performance of the proposed network is much better than applying MTL and single task learning. Adding meta learning to MTL leads to meta-knowledge transfer, which shares semantic composition function across tasks. In neural representation learning of text sequences, the semantic composition function is of extreme significance.

Zhang et al (2021) introduce a multimodal meta multitask learning approach for rumor detection and stance detection in social media, as illustrated in Fig. 4. The multimodal inputs here are text and images, converted into embeddings and fused to the model. This article discusses the feature level, meta level, and task level challenges related to the problem statement. This suggests sharing the higher meta knowledge between tasks, i.e., sharing features in the initial layers of the model and further no sharing in the task specific lower layers. Here, feature sharing between tasks is considered meta-knowledge, actually it is a form of hard parameter sharing in a multi-task setting. Therefore, the article’s title mentions meta multitask, but there is no meta learning applied.

The Parameters Read-Write Networks (PRaWNs) were introduced by Liu and Huang (2018), and present a novel concept of communication between the tasks in a multi-task setting. The idea is to allow various tasks to pass the gradients explicitly, restricting the tasks to update parameters constantly. Therefore the gradients are passed between tasks pairwise and list-wise, where list-wise gradients account for task relatedness. The features learned in the shared space are usually entangled. This proposed model helps untangle features in different domains. As a result, the given use-case avoids the escape of private information in the shared space. Liu and Huang (2018) investigate the proposed network for text classification, sequence tagging, and image aesthetic assessment tasks for in-task (same dataset) and out-of-task (new dataset) settings. It was concluded that the introduced gradient passing mechanism for out-of-task settings shows better generalization to unseen tasks.

In a similar work Tarunesh et al (2021) offered an approach to learn interactions between languages and tasks by employing meta learning in a multi-task scenario. Question answering, parts of speech tagging, name entity recognition, paraphrase identification, and natural language inference are the multitasks in considered in this work. They exploit the fact that these tasks can benefit from each other and that cross lingual embeddings in multiple language learning can be helpful in the case of languages with limited data. Therefore the meta information in this work is the task relatedness plus the language relatedness. They also propose sampling techniques such as heuristic and parameterized sampling to be integrated into meta learning to improve the performance of the model. This approach can be very useful for languages with limited data resources as it performs significantly well on zero-shot new target languages.

Personalized dialogue generation was improved by using Meta and MTL by Lee et al (2021), who sought to overcome the problem of a large dataset

for every person and included pre-defined persona information. In this work, an auxiliary task of persona reconstruction is added only at the meta training stage to gather the persona information as meta-knowledge for the dialogue generation task. This makes the model able to generate dialogues for new users at the time of meta testing. Two frameworks are introduced – Multi-Task Meta-Learning (MTML), which combines losses from both tasks, and Alternating Multi-Task Meta-Learning (AMTML), which operates alternatively on the tasks of generation and persona reconstruction. A similar work [Chen and Zhu \(2020\)](#) aims at text style transfer with limited data, basically paraphrasing text from one writing style to another. It employs the Model Agnostic Meta Learning (MAML) ([Finn et al \(2017\)](#)) algorithm for few shot text style transfer, and a task corresponds to a pair of styles, so viewing style transfer between each pair as a domain specific task, that employs MTL. This enables the transfer (to and from) writing styles which have small training data and data that the model has not seen before due to the meta learning framework. The proposed methodology outperforms the state-of-art method in text style transfer.

[Lekkala and Itti \(2020\)](#) combine concepts from meta learning, MTL and visual attention for image classification and estimation of depth, vanishing point, and surface normal from a single input image. The flexible attention mechanism is used to adapt the network for a particular task, and the features in the generic modules (or backbone) of the network are weighted according to the importance of the specific task. The task specific modules (or layers) are adapted to unseen tasks by employing the Almost No Inner-Loop MAML (ANI-MAML) ([Raghu et al \(2020\)](#)) training procedure, hence introducing the role of meta learning in this work. The attention mechanism and meta learning made it possible for the task heads to learn to adapt new unseen tasks in lesser data instances. Along with learning the task specific representations, the primary issue was to learn task-invariant representations. The MTL architecture solved this by providing inductive bias on selected features as directed by the attention procedure.

[Cai et al \(2020\)](#) introduces meta learning and MTL for speech emotion recognition. In this work, the emotion classification for each user is considered the auxiliary tasks used for meta training, also known as the multi-train stage. Next is the knowledge transfer stage wherein, the meta information from the training stage is used to train and evaluate the model for a new user. Therefore, this article aims to model the relationship between the auxiliary tasks, i.e., users, and transfer knowledge to the target task. This is very much the concept of meta learning as discussed in [Sec. 2](#); this work considers the multiple tasks during training as MTL and therefore mentions meta multi-task learning in the title.

The article [Liu et al \(2020\)](#) solved the challenge of data shortage and disease diversity in mortality prediction of rare diseases by employing a multi-task architecture along with the meta learning optimization scheme MAML ([Finn et al \(2017\)](#)). Here the multiple tasks are detecting the temporal occurrences

of rare diseases, and the input is multi-modal, i.e., text, images, signals, etc. A learning method called Ada-SiT (Adaptation to Similar Task) is introduced in this work, in which the task similarity is measured during meta training and this is used to share initialization for faster adaptation of new tasks.

All articles discussed above appear (and are relevant) in the ‘in-title’ search for meta learning and MTL on Google Scholar. Some articles (Chen et al (2018); Cai et al (2020); Zhang et al (2021); Liu and Huang (2018); Lee et al (2021)) which are discussed above refer the combination as *Meta Multi-task Learning* which focuses on improving multi-task learning by employing meta learning to gather meta knowledge (e.g., task relationships) to transfer it to new task. A few works such as Lee et al (2021); Chen and Zhu (2020); Lekkala and Itti (2020) mention *Multi-task Meta Learning* that focus on upgrading meta learning by introducing multi-task learning for allowing training with heterogeneous tasks as well as efficient training mechanisms for better learning of features. In general, there is no logical explanation of the taxonomy used for employing the two algorithms together. They can be used interchangeably to integrate these learning mechanisms is to leverage the qualities of both meta learning and MTL.

*Some Exceptions* : Wang et al (2021) discusses about bridging MTL and meta learning. The introduction of paper gives an impression of combining MTL and meta learning, while the main objective is to establish a relation between both paradigms. They presented a theoretical and empirical explanation which states that for a sufficiently deep neural network the predictions of MTL and gradient based meta learning algorithms are similar, and also they have similar optimization formulation. There are also a few articles such as Bronskill et al (2020); Ghadirzadeh et al (2021); Kedia and Chinthakindi (2021); Tian et al (2019); Lin et al (2019); Krueger et al (2020) which by abuse of terminology refer to the training of multiple tasks or learning episodes in meta training stage as MTL, thereby considering the work as meta multi-task learning. Also, a few articles (Bansal et al (2020); Zou and Lu (2020); Zintgraf et al (2020); Zhou et al (2020); Krueger et al (2020); Guo et al (2020); Kim and Pavlovic (2020, 2021)) in the google scholar search for meta multi-task learning (or multi-task meta learning) merely mention these terms in related work or future work sections. In a similar search, a handful of articles (Retyk (2021); Ghosh et al (2020a,b); Li et al (2009)) focusing on meta multi-task reinforcement learning are also presented. However, these are not discussed here as they are beyond the scope of this work.

## 3.2 Research in multi-task transfer learning

Transfer learning and MTL usually differ in how and when the information is shared between tasks. However, they can be used together in the following ways,

1. Transfer learning enables the extraction of features for tasks by employing models pre-trained for some other related tasks on a large dataset, which


can further be used in a multi-task setting. For instance, when there are multiple related target tasks. MTL is employed to solve them, and the source task is conventional supervised learning.

2. Another way of fusing these algorithms is when there are multiple source tasks such that MTL can be applied and the knowledge is shared with the target task in terms of model parameters, features, etc.

In the past, these two learning paradigms were used together a number of times. [Ye et al \(2018\)](#) aimed to predict pharmacokinetic parameters by learning a model for quantitative structural activity relationships of drugs. The four parameters, i.e., oral bioavailability, plasma protein binding rate, apparent volume of distribution in the steady-state, and elimination half-life, were estimated in this work. These four parameters are considered multiple tasks. This follows the first approach discussed above of feature extraction and multiple tasks in the target domain. First, a pretrained model is learned on an extensive bioactivity dataset, the knowledge from which is further used in the multi-task DeepPharm model proposed in the article, as depicted in Fig. 5. The integrated multi-task and transfer learning approach enhanced the generalization of the model compared to the conventional models, and overcame the lack of sufficient and high quality data in the Absorption, Distribution, Metabolism, and Excretion (ADME) evaluation. Such a well generalized model may be helpful to perform ADME calculations on the new drug structures using the DeepPharm model, i.e., making inferences only, as there is no need to train the model again on different data. This article opens a new dimension of research drug discovery and development using combining DL algorithms.

An example of the second type of fusion mentioned above, i.e., when the source task is MTL from which the learned information is transferred to a target task, is illustrated in an article by [Hasan et al \(2020\)](#). The aim of this article is fault diagnosis of rolling element bearings under uncertain working conditions. First, MTL is enforced to determine the speed and health type of the machines (in general) by using the bi-spectrum based analysis of the vibration signals as inputs. Furthermore, transfer learning is used to enhance the classification performance by using the proposed MTL-CNN as the source task and identifying the bearing faults under severe conditions as the target task. Since there are usually fewer faulty bearing data in extreme conditions (as this is a type of anomaly), the transfer learning technique is advantageous. The pre-trained model for extracting features in the target dataset in a multi-task setting leads to good performance on the unseen target data.

In [Cruz et al \(2020\)](#), pretrained transfer learning models such as BERT ([Devlin et al \(2019\)](#)), ULMFiT ([Howard and Ruder \(2018\)](#)) and GPT-2 ([Radford et al \(2019\)](#)), were used for fake news detection. This included an auxiliary language modeling task to adapt to the writing style of the downstream task of fake news detection. Therefore, multi-task fine-tuning was introduced in this work by combining losses from both tasks. In a similar work by [Dong et al \(2019\)](#), transfer learning and MTL were used together for Named Entity Recognition (NER) on Chinese Electronic Medical Records (EMR). This

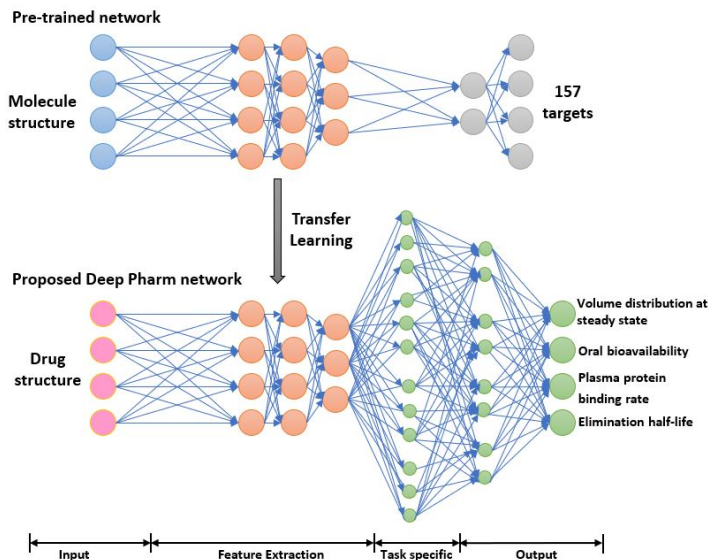

**Fig. 5:** Illustration of the integration of transfer learning and MTL (Ye et al (2018))

trains a bi-directional LSTM in the general (source) domain and further uses the acquired knowledge from the source domain to improve the performance of NER in Chinese EMR, i.e., the target domain. Parts-of-Speech (POS) tagging and NER are the two tasks in the target domain that are trained alternatively, so that knowledge from one task may enhance the knowledge gained by the other task. Since this work aims at NER, POS is treated as an auxiliary task that aids in better learning of Chinese NER. On similar grounds, Taslimipoor et al (2019) intend to classify the multi-word expressions with the help of two auxiliary tasks of dependency arcs and labels. To attain this, it utilizes knowledge shared by the pretrained model for POS and dependency parse tags for two different languages. This is because the target language has limited resources, and cross-lingual transfer learning helps overcome this issue.

Multi-task transfer learning is also used in the article by Du et al (2020) for neural decoding, which decodes the brain activity to reconstruct visual information. To achieve this, first, fMRI voxel features of the brain are decoded into CNN features by using Structured Multi-output Regression (SMR) (i.e., Voxel2Unit). Then, the predicted CNN features are converted to an image using introspective conditional generation (i.e., Unit2Pixel). Multiple CNN features are decoded from the fMRI data using SMR, and every single output prediction is considered a task, thereby applying MTL for the Voxel2Unit process. For the Unit2Pixel process, a pretrained CNN called AlexNet (Krizhevsky et al (2012)), trained on large image data ImageNet

(Deng et al (2009)) is used for image reconstruction as a part of deep generative models, particularly a combination of Variational Auto-Encoders (VAEs) (Kingma and Welling (2014)) and Generative Adversarial Nets (GANs) (Goodfellow et al (2014)).

The article Nguyen et al (2021) analyzed the characters of a digital Japanese comic named Manga, using Bi-modal inputs, i.e., the graphics and text information. This approach uses pretrained networks such as BERT (Devlin et al (2019)) and ResNet (He et al (2015)) for text and visual feature extractors, respectively, to obtain the feature embeddings to combine data from both modes. These embeddings are further used in a multi-task architecture for character retrieval, identification, and clustering tasks. These three tasks are independent; each can be accomplished by training three different models using the same images and text (uni-modal inputs can also be used). However, since they share common multi-modal inputs (image and text), they are suitable for MTL. Certainly, sharing parameters between tasks improves the performance of all tasks compared to when they are trained in isolated. The strength of MTL i.e., handling multi-modal inputs and multiple tasks and transfer learning i.e., good feature representations is demonstrated in this work.

Qu et al (2019), exploited a few-shot Dirichlet-Net based MTL for hyper-spectral image classification. An encoder-decoder network to reconstruct hyper-spectral images was used, and the representations were shared using the encoder in a classifier network. This ensemble of encoder-decoder and classifier is termed as MTL in this article. The encoder takes two images of different domains as input and extracts both representative and discriminative vector representations from both domains; these encoder network parameters are shared with the classification network to extract features of the input image patches to predict output labels. The important contribution of this article is the extraction of shared representations from objects in different domains by applying transfer learning.

Another exciting application by Dong and Khosla (2021), aimed to estimate virus-human protein interactions by pre-training a source model called UniRep (Alley et al (2019)) to produce features or protein embeddings. Due to the scarcity of training data for virus-human protein interactions, the article trained a network on powerful statistical protein representations, i.e., source tasks. The target task performed MTL by extracting the embeddings using the source network to find human protein-protein interactions (PPIs) and human virus PPI. Likewise, Aydin and Erdem (2019) used VGGNet (Simonyan and Zisserman (2015)) for pre-training, and the extracted features were used to detect and identify of copper and plastic wires buried in the ground, using Ground Penetrating radar (GPR) scans. Identifying the type of soil (wet or dry) in the target domain is also added, making it a MTL application. It is observed that in many of the articles, such as Cruz et al (2020); Dong and Khosla (2021); Simonyan and Zisserman (2015), a source network is trained on a large dataset of one domain, which is exploited by the target dataset of



another domain having fewer data resources. Therefore transfer learning helps to find good feature representations leading to better generalization. Along with the multi-task architecture, it makes it possible to train many tasks jointly.

*Some Exceptions:* Some Google Scholar search results for MTL and transfer learning examine these learning paradigms independently, which is not the purpose of this article. This section focuses on papers that combine the two learning algorithms. [Xu and Yang \(2011\)](#), give a detailed survey of how transfer learning and MTL individually are used in bio-informatics. [Kamath et al \(2019\)](#) is a book chapter that discusses transfer learning types and describes MTL as a variant of transfer learning. While [Sun et al \(2019\)](#); [Ricci et al \(2017\)](#) details types of multi-view transfer learning and multi-view MTL. The articles [Wang and Pineau \(2015\)](#); [Maurer et al \(2014\)](#) give theoretical concepts of improving the performance of MTL and transfer learning in general.

### 3.3 Research in Meta transfer learning

Transfer learning and meta learning are extremely similar in the sense that they both involve source tasks and unknown target tasks, and the goal of each is to achieve a superior generalization on the target task. Meta-learning, in contrast to transfer learning, has a two-level optimization technique. Transfer learning is now ubiquitous, as pretrained models are used in nearly all applications and algorithm types, they are either fine-tuned or trained from scratch for in various applications. However, numerous studies in the literature claim to use a combination of transfer learning and meta learning, and a few of these are mentioned here.

As already discussed in Sec. 3.2 transfer learning can be crucial in extracting data features using a pre-trained model and therefore can integrate with other learning algorithms. The article by [Sun et al \(2019, 2020\)](#) followed a similar approach for performing few-shot learning. Transfer learning is used during meta training by extracting representations of images using a model trained on a very large dataset such as MiniImageNet ([Vinyals et al \(2016\)](#)). The meta transfer learning proposed in this work answers two critical questions, i.e., what to transfer and how to transfer. The Deep Neural Network (DNN) parameters trained on the large-scale data answer what to transfer, whereas the scaling and shifting operations learned for each task introduced in this work refer to how to transfer. The meta-knowledge from the training stage is shared in the testing stage on the Fewshot-CIFAR 100 ([Oreshkin et al \(2018\)](#)) dataset to learn new tasks using fewer data instances. They also propose a hard task meta batch strategy in which, rather than randomly picking meta training tasks, the algorithm resamples the hard tasks based on the past validation accuracy and failure. The use of pre-trained DNN was proved to be very useful for tailoring the learning experience for unseen tasks.

Likewise, [Soh et al \(2020\)](#) use transfer learning together with the optimization based meta learning method MAML ([Finn et al \(2017\)](#)) for zero shot super-resolution of images. For faster adaptation and better generalization on



new tasks, meta learning helps learn effective initial parameters during training. At the time of meta testing, it takes only a few gradient steps to learn the image specific information, even in case of external (or new) data instances. The learning strategy introduced in this work learns initialization parameters with reference to different blur conditions, making it possible to adapt to new (unseen) blur kernels quickly. It uses a large-scale dataset, ImageNet (Deng et al (2009)), for transfer learning and meta training; during meta testing, low resolution images are used to train a model with a corresponding blur kernel. Therefore, the model can be trained for multiple types of blur kernels at the testing stage.

A recent article by Willard et al (2021) adopted meta transfer learning for predicting the dynamics of the water temperature of un-monitored lakes. Since the data for the un-monitored lakes are insufficient and all deep learning models need significant amount of data to learn, this work utilized the available data of the monitored lakes to learn the models and transfer knowledge to the domain with fewer resources. It exploits the monitored lake data by extracting important characteristics and using two source models, i.e., process-based and process-guided deep learning, on each monitored lake and evaluating the model performance, thereby applying transfer learning to the un-monitored lakes. This meta-knowledge of features and performance of the models of the monitored lakes is used to select the best model for the un-monitored lakes based on the lowest predicted error. These pre-trained models outperform on the target un-monitored lake compared to when no transfer of learning is performed.

For vehicle tracking using Unmanned Aerial Vehicle (UAV) Song et al (2020), used a pretrained model for vehicle tracking on ground images and employed the model to adapt to the drone view images. From the deep learning viewpoint, vehicle tracking in UAV is an under-explored research area, as these videos have significantly less labeled data. To overcome this problem of data availability, transfer learning is employed. A large ground view vehicle tracking dataset is used to train a model, which is then used by the drone-view dataset, therefore transferring features across landscapes. Meta learning is used to adaptively extract shared features between both domains (drone and ground view). Therefore, transfer learning helps to overcome the data scarcity problem, while meta learning solves the issue of domain shift.

Soh et al (2020) employed optimization based meta transfer learning with zero shot super resolution (MZSR). The proposed method i.e., MZSR gives significantly better results in just one gradient step as compared to only Zero Shot Super Resolution (ZSSR). Meta learning is used to learn image specific (internal) information, while transfer learning is adopted prior to meta learning to utilize the external samples. The learning episodes during meta training were images from different blur kernels, that help to quickly adapt the image specific features. According to the authors, the propose method can be interpreted as a self-supervised approach to super resolution.

*Some Exceptions:* The ‘transfer of meta information’ (which is solely meta learning) is also termed as meta transfer learning in articles such as Nguyen


et al (2018); Bastani et al (2021); Duan et al (2021); Aioli (2012); Tang et al (2022); Shen et al (2022). Like Nguyen et al (2018), the meta information for facial emotion classification on one dataset is transferred to another dataset. Similarly, Tang et al (2022) discusses cross subject EEG emotion recognition task. It uses meta learning to adapt to out of distribution data i.e., for subjects with less (or insufficient) data. Bastani et al (2021) discuss transferring knowledge across experiments for dynamic pricing applications. Aioli (2012) introduced a variant of meta learning which learns how to learn kernels from data and share the sequence of transformations to find a kernel for a new task. These are solely meta learning applications, but due to linguistic inconsistencies, they fall under the category of meta transfer learning, when actually it refers to simply transfer of meta learnings (or knowledge).

## 4 Discussion - Why should these learning paradigms be used together?

As discussed in Sec. 2.5, the learning algorithms have some strengths and drawbacks, and when the union of two algorithms is employed, it helps to overcome a few weaknesses. For instance, the integration of multitasking with meta learning enables the introduction of a new task in multitasking and the existence of diverse tasks in meta learning. Nevertheless, at the same time, the issue of making architectural changes for a new task in MTL and large data requirements remains a challenge. For the combination of meta and transfer learning, faster learning with fewer data and good performance on a new task are strengths. However, the fact that this combination focuses solely on enhancing the target tasks cannot be overlooked. Similarly, the merger of transfer learning with MTL enables the handling of multi-modal inputs and various heterogeneous tasks, requiring less data for training and aiming to boost performance all the tasks (because of MTL). Nevertheless, at the same time suffer from the problem of being unable to integrate an unseen task and good generalization (as often pre-trained models tend to overfit). A reliable solution that may help overcome the issues mentioned above is an ensemble of the three learning paradigms, i.e., MTL, meta learning, and transfer learning. The primary objectives of this ensemble are as follows:


1. Good performance on a new unseen task (due to meta learning)
2. Ability to handle multi-modal inputs and heterogeneous tasks (due to MTL)
3. Require less training data and good feature representation for learning (due to transfer learning)

Therefore, we present *Multi-modal Multi-task Meta Transfer Learning* (3MTL) as the combination that achieves the aforementioned criteria. There are many approaches in which this ensemble may be implemented. Fig. 6 illustrates how these algorithms can be put together, based on the research

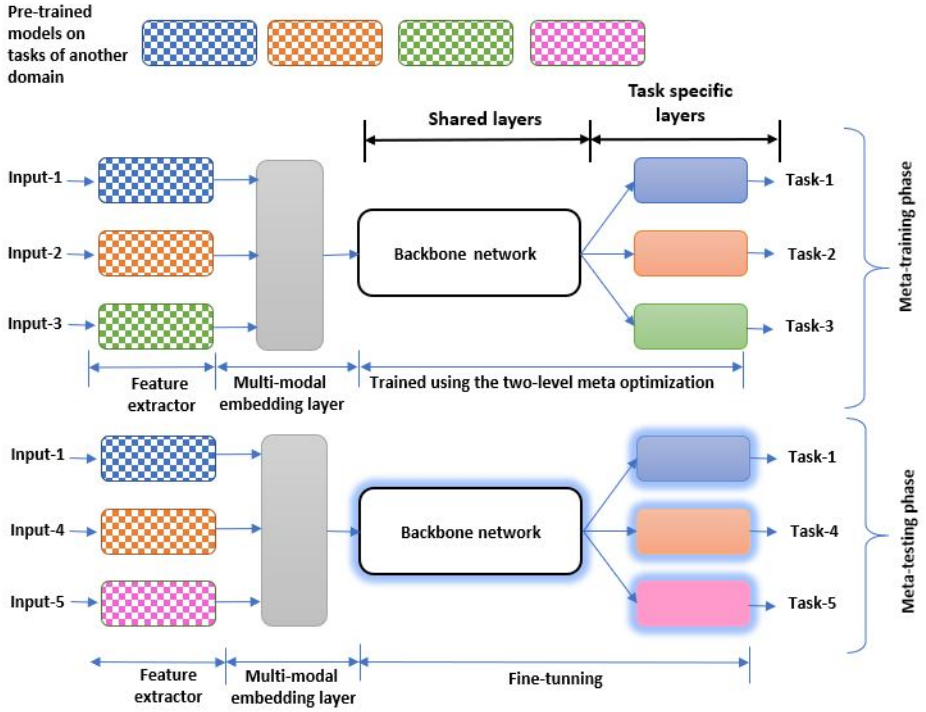

**Fig. 6:** Proposed implementation, that ensembles MTL, meta learning and transfer learning. Here the checkered rectangle boxes represent the pretrained layers (or model), the solid rectangle boxes are the layers trained from scratch and the glowing rectangle boxes denote the layers which are fine-tuned, i.e., the parameters from the source model act as initialization for the target network.

presented in Sec. 3; when the model’s architecture is in line with MTL, transfer learning is employed, as pre-trained models are used to improve feature extraction for a wide range of inputs. Then the backbone network and multi-head modules are trained using a two-level optimization that is employed in meta learning. Assuming the inputs are multimodal, the pre-trained networks (checkered boxes) extract essential features from the inputs, and these are processed accordingly in the multimodal embedding layer before forwarding to the backbone network, similar to what was presented by [Zhang et al \(2021\)](#); [Team et al \(2021\)](#). The backbone network refers to the generic layers of the neural network or CNN, whose input combines embeddings from various inputs. The output from the backbone network goes into the task-specific layers. The architecture of every task-specific layer can differ as required by the task. Therefore, in the meta training stage, the multi-task architecture helps to learn many tasks together, thereby improving the performance of all the tasks. When new tasks (Task-4 and Task-5) are introduced in the meta testing stage, it is easy to learn in fewer data instances. The inductive bias of the multi-task architecture

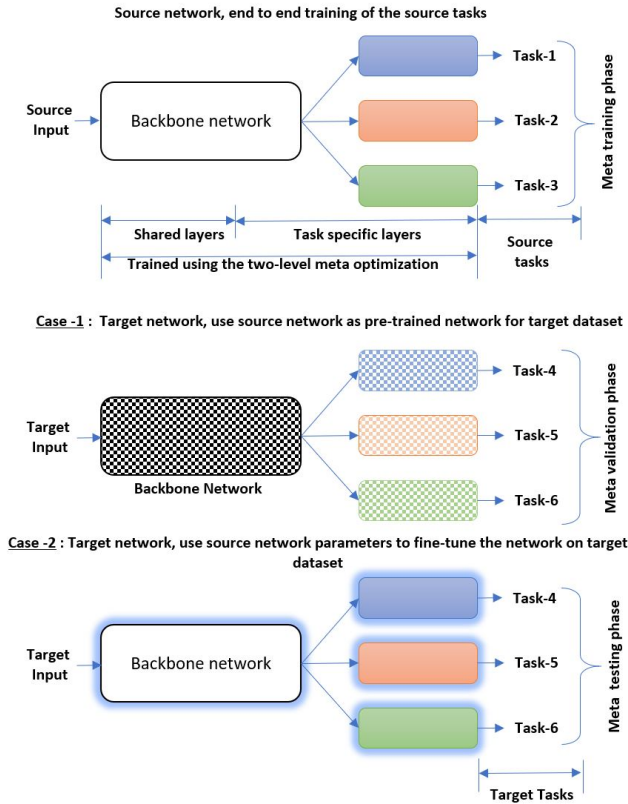

**Fig. 7:** Variant of the proposed implementation in Fig. 6, showing instance of single input and multiple tasks. The case-1 and 2 can be understood from two points of view: transfer learning and meta learning, while architecture represents MTL. Here checkered rectangle boxes represent pretrained layers (or model), solid rectangular boxes are layers trained from scratch and glowing rectangle boxes denote layers that are fine-tuned for unseen target data.

assists in better generalization than single task learning. Also, in this stage, it allows for both feature extraction and fine-tuning variants of transfer learning. This proposed implementation gives the liberty to add new heterogeneous tasks and allows for multi-modal inputs; transfer learning and meta learning also enable learning with fewer data samples during meta testing. MTL helps to improve the performance of both the source and the target tasks. Hence, it complies with all three objectives mentioned above.

A variant of the implementation in Fig. 6 is shown in Fig. 7. It represents the instance when there is one input and many tasks related to it (similar to the illustration in Fig. 1). Here a multi-task source architecture can be meta trained for many different datasets and similar tasks. Later the network is used for some data of a different domain, and the meta information from


the training phase is helpful for improved learning of the target tasks. The trained network on the source data can be employed as a feature extractor i.e., Case -1 in Fig. 7 or fine-tuned for the target data i.e., Case-2 in Fig. 7, is the transfer learning point of view. Another way of viewing this approach is from the meta learning point of view, wherein the training of the source tasks can be considered as the meta training stage, the case-1 can be treated as the meta validation stage because there is no training. It is only making inference on a new data, and the case-2 is nothing but the meta testing stage which uses the initial parameters from the source model and then trains the network on new target dataset.

Fig. 6 is a plausible approach of how to fuse the learning paradigms. Adhering to the three primary objectives, indeed there can be several other ways of accomplishing this. Not to forget, the approach should exploit all the advantages of these learning algorithms and try to overcome their weakness of each. Also, these approaches depend on the use-case and the available dataset, i.e., the number of tasks, modality of the data, amount of data samples, etc. To the best of our knowledge, there is no such work in the literature that employs the ensemble of meta learning, transfer learning, and MTL. Indeed, the related work or future scope section of many articles mentions these three learning algorithms, but none illustrate applying them together.


## 5 Open questions in MTL and future work

To summarize, this article discusses the fundamentals of transfer learning, MTL, and meta learning gives a comparative view on these three algorithms, details the literature study when pairs of these algorithms are employed together, and also proposes a few approaches of how all the three learning paradigms can be jointly used to overcome the drawbacks of each other. Since the proposed approaches are a combination of transfer learning, meta learning, and MTL, along with the liberty to employ multi-modal inputs and heterogeneous tasks, this study introduces the ensemble as 3MTL. These suggested techniques in Sec. 4 may overcome most of the drawbacks faced by the learning algorithms when used in isolation. To investigate this, this survey article enlists a few open research questions. These are:


1. How is the proposed 3MTL approach better than single task learning?
2. In 3MTL, is there a possibility for modular learning? In particular, for an unseen task, can the network automatically choose, based on the meta knowledge, which part of the network should be trained rather than training the whole network and how to exploit the shared structure (using transfer learning) ?
3. Do similar tasks automatically resort to similar sub-architecture training?
4. How can meta learning and transfer learning help to automatically alter the network architecture for a new task?
5. In case of multi-modal inputs, analyze the contribution of each modality for the outcome.

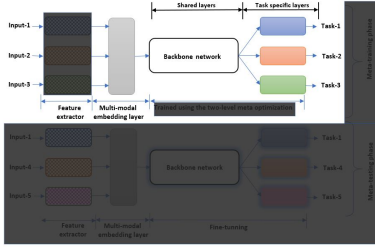

(a) Generic approach deprecated to MTL, by not using the pre-trained networks, not employing the meta optimization and also avoiding the testing on unseen tasks.

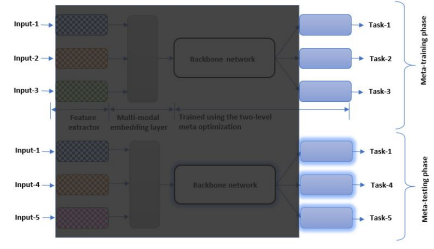

(b) Generic approach deprecated to meta learning, by avoiding the use of pre-trained models and also the shared layers where the fused features from the embeddings layer is given as inputs.

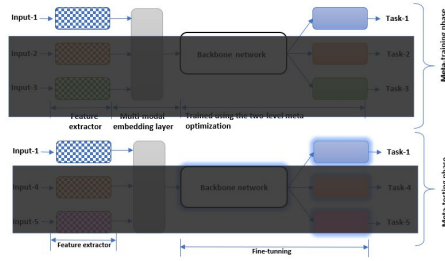

(c) Generic approach deprecated to transfer learning, by not using the shared backbone network and the meta optimization scheme, along with using the pre-trained models and fine-tuned layers as required for various tasks.

**Fig. 8:** An illustration of reducing the generic structure of Fig. 6 to individual learning paradigms. The black(hidden) area represent that the blocks underneath are disabled.

This work therefore proposes a novel generic approach to implement 3MTL in Fig. 6, keeping in mind the three objectives required for the ensemble. It is possible to reduce the global approach to any learning paradigm, as shown in Fig. 8. For example, as illustrated in Fig. 8a, only MTL can be achieved by not introducing the new tasks, by avoiding the use of pre-trained models and also by not employing the bi-level meta optimization scheme, i.e., when  $\theta = \phi$  in the meta training phase Sec. 2.4, narrows down to only one optimization objective and multiple tasks for training. Fig. 8b demonstrates how the generic implementation can be reduces to meta learning, by adding no pre-trained models, no embedding layer to fuse the embeddings and also no shared layers, as every isolated input is trained for a task using two level optimization in the training phase and in the meta testing phase new tasks can be introduced.

On the same conditions, if even the optimization is cut- down to single level optimization, along with giving the ability to use the pre-trained and fine tune networks (howsoever required), the approach is now shortened to transfer learning as in Fig. 8c. It can be considered as a global learning structure, which gives the flexibility to choose between the learning algorithms and also combinations of them.

Since the global network introduced in this work makes it possible to choose the elements required to learn the task, it will undoubtedly be worthwhile to meta-train the network to learn to evaluate which elements will do justice to a task, rather than employing all the learning algorithms. Because there is a possibility that jointly learning is not possible, and in such a scenario, the idea is to learn to activate only parts of the network, thereby foreseeing a formulation of the meta-meta learning algorithm. In consequence, as future research, it will be interesting to explore how these learning paradigms together share to learn and learn to share, along with knowing when to share and thereby making it possible to develop more human-like learning techniques.

## References

- Fong R, Scheirer W, Cox D (2017) Using human brain activity to guide machine learning. [1703.05463](#)
- Liu B (2017) Lifelong machine learning: A paradigm for continuous learning. *Front Comput Sci* 11(3):359–361. <https://doi.org/10.1007/s11704-016-6903-6>, URL <https://doi.org/10.1007/s11704-016-6903-6>
- Caruana R (1993) Multitask learning: A knowledge-based source of inductive bias. In: *Proceedings of the Tenth International Conference on International Conference on Machine Learning*. Morgan Kaufmann Publishers Inc., San Francisco, CA, USA, ICML’93, p 41–48
- Chen Z, Liu B, Brachman R, et al (2018) *Lifelong Machine Learning*, 2nd edn. Morgan & Claypool Publishers
- Crawshaw M (2020) Multi-task learning with deep neural networks: A survey. *arXiv preprint arXiv:200909796*
- Ruder S (2017) An overview of multi-task learning in deep neural networks. *ArXiv abs/1706.05098*
- Zhang Y, Yang Q (2018) An overview of multi-task learning. *National Science Review* 5(1):30–43
- Vandenhende S, Georgoulis S, Van Gansbeke W, et al (2021) Multi-task learning for dense prediction tasks: A survey. *IEEE transactions on pattern analysis and machine intelligence*

- Thung KH, Wee CY (2018) A brief review on multi-task learning. *Multimedia Tools and Applications* 77(22):29,705–29,725
- Chen S, Zhang Y, Yang Q (2021) Multi-task learning in natural language processing: An overview. *arXiv preprint arXiv:210909138*
- Hospedales TM, Antoniou A, Micaelli P, et al (2020) Meta-learning in neural networks: A survey. *IEEE Transactions on Pattern Analysis & Machine Intelligence* pp 1–1. <https://doi.org/10.1109/TPAMI.2021.3079209>
- Peng H (2020) A comprehensive overview and survey of recent advances in meta-learning. *arXiv preprint arXiv:200411149*
- Luo S, Li Y, Gao P, et al (2022) Meta-seg: A survey of meta-learning for image segmentation. *Pattern Recognition* p 108586
- Lee Hy, Li SW, Vu NT (2022) Meta learning for natural language processing: A survey. *arXiv preprint arXiv:220501500*
- Zhuang F, Qi Z, Duan K, et al (2021) A comprehensive survey on transfer learning. *Proceedings of the IEEE* 109(1):43–76. <https://doi.org/10.1109/JPROC.2020.3004555>
- Arnold A, Nallapati R, Cohen WW (2007) A comparative study of methods for transductive transfer learning. In: *Seventh IEEE International Conference on Data Mining Workshops (ICDMW 2007)*, pp 77–82, <https://doi.org/10.1109/ICDMW.2007.109>
- Weiss K, Khoshgoftaar TM, Wang D (2016) A survey of transfer learning. *Journal of Big data* 3(1):1–40
- Pan SJ, Yang Q, Fan W, et al (2010) A survey on transfer learning. *IEEE Transactions on Knowledge and Data Engineering*
- Niu S, Liu Y, Wang J, et al (2020) A decade survey of transfer learning (2010–2020). *IEEE Transactions on Artificial Intelligence* 1(2):151–166. <https://doi.org/10.1109/TAI.2021.3054609>
- Nguyen CT, Van Huynh N, Chu NH, et al (2022) Transfer learning for wireless networks: A comprehensive survey. *Proceedings of the IEEE* 110(8):1073–1115. <https://doi.org/10.1109/JPROC.2022.3175942>
- Zhang W, Deng L, Zhang L, et al (2021) A survey on negative transfer. **2009.00909**
- Mitchell TM (1997) *Machine Learning*, 1st edn. McGraw-Hill, Inc., USA



- Hasselmo ME (2017) Avoiding Catastrophic Forgetting. <https://doi.org/10.1016/j.tics.2017.04.001>, URL <http://dx.doi.org/10.1016/j.tics.2017.04.001>
- Goodfellow IJ, Bengio Y, Courville A (2016) Deep Learning. MIT Press, Cambridge, MA, USA, <http://www.deeplearningbook.org>
- Caruana R (1997) Multitask learning. *Machine learning* 28(1):41–75
- Raina R, Battle A, Lee H, et al (2007) Self-taught learning: Transfer learning from unlabeled data. In: *Proceedings of the 24th International Conference on Machine Learning*. Association for Computing Machinery, New York, NY, USA, ICML '07, p 759–766, <https://doi.org/10.1145/1273496.1273592>, URL <https://doi.org/10.1145/1273496.1273592>
- Farahani A, Voghoei S, Rasheed K, et al (2020) A brief review of domain adaptation. [2010.03978](https://arxiv.org/abs/2010.03978)
- Dai W, Yang Q, Xue GR, et al (2008) Self-taught clustering. In: *Proceedings of the 25th international conference on Machine learning*, pp 200–207
- Xu D, Ouyang W, Wang X, et al (2018) Pad-net: Multi-tasks guided prediction-and-distillation network for simultaneous depth estimation and scene parsing. 2018 IEEE/CVF Conference on Computer Vision and Pattern Recognition pp 675–684
- Zamir AR, Sax A, Shen WB, et al (2018) Taskonomy: Disentangling task transfer learning. In: *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, IEEE
- Maurer A, Pontil M, Romera-Paredes B (2016) The benefit of multitask representation learning. *Journal of Machine Learning Research* 17(81):1–32. URL <http://jmlr.org/papers/v17/15-242.html>
- Thrun S, Pratt L (eds) (1998) *Learning To Learn*. Kluwer Academic Publishers, Boston, MA
- Baxter J (1998) Theoretical models of learning to learn. In: *Learning to learn*. Springer, p 71–94
- Finn C, Abbeel P, Levine S (2017) Model-agnostic meta-learning for fast adaptation of deep networks. In: Precup D, Teh YW (eds) *Proceedings of the 34th International Conference on Machine Learning*, *Proceedings of Machine Learning Research*, vol 70. PMLR, pp 1126–1135, URL <https://proceedings.mlr.press/v70/finn17a.html>
- Li D, Yang Y, Song YZ, et al (2018) Learning to generalize: Meta-learning for domain generalization. In: *Proceedings of the AAAI conference on artificial*

intelligence

- Qiu S, Zhu C, Zhou W (2021) Meta self-learning for multi-source domain adaptation: A benchmark. In: Proceedings of the IEEE/CVF International Conference on Computer Vision, pp 1592–1601
- Triantafillou E, Zhu T, Dumoulin V, et al (2019) Meta-dataset: A dataset of datasets for learning to learn from few examples. arXiv preprint arXiv:190303096
- Ma Y, Zhao S, Wang W, et al (2022) Multimodality in meta-learning: A comprehensive survey. *Knowledge-Based Systems* p 108976
- Zhang H, Qian S, Fang Q, et al (2021) Multi-modal meta multi-task learning for social media rumor detection. *IEEE Transactions on Multimedia*
- Chen J, Qiu X, Liu P, et al (2018) Meta multi-task learning for sequence modeling. In: Proceedings of the AAAI Conference on Artificial Intelligence
- Liu P, Huang X (2018) Meta-learning multi-task communication. arXiv preprint arXiv:181009988
- Tarunesh I, Khyalia S, Kumar V, et al (2021) Meta-learning for effective multi-task and multilingual modelling. arXiv preprint arXiv:210110368
- Lee JY, Lee KA, Gan WS (2021) Generating personalized dialogue via multi-task meta-learning. [2108.03377](#)
- Chen X, Zhu KQ (2020) St<sup>2</sup>: Small-data text style transfer via multi-task meta-learning. [2004.11742](#)
- Lekkala K, Itti L (2020) Attentive feature reuse for multi task meta learning. [2006.07438](#)
- Raghu A, Raghu M, Bengio S, et al (2020) Rapid learning or feature reuse? towards understanding the effectiveness of maml. In: International Conference on Learning Representations, URL <https://openreview.net/forum?id=rkgMkCEtPB>
- Cai R, Guo K, Xu B, et al (2020) Meta multi-task learning for speech emotion recognition. In: INTERSPEECH, pp 3336–3340
- Liu L, Liu Z, Wu H, et al (2020) Multi-task learning via adaptation to similar tasks for mortality prediction of diverse rare diseases. *AMIA Annual Symposium proceedings AMIA Symposium 2020*:763–772

- Wang H, Zhao H, Li B (2021) Bridging multi-task learning and meta-learning: Towards efficient training and effective adaptation. In: International Conference on Machine Learning, PMLR, pp 10,991–11,002
- Bronskill J, Gordon J, Requeima J, et al (2020) TaskNorm: Rethinking batch normalization for meta-learning. In: III HD, Singh A (eds) Proceedings of the 37th International Conference on Machine Learning, Proceedings of Machine Learning Research, vol 119. PMLR, pp 1153–1164, URL <https://proceedings.mlr.press/v119/bronskill20a.html>
- Ghadirzadeh A, Chen X, Poklukur P, et al (2021) Bayesian meta-learning for few-shot policy adaptation across robotic platforms. [2103.03697](#)
- Kedia A, Chinthakindi SC (2021) Keep learning: Self-supervised meta-learning for learning from inference. In: Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume. Association for Computational Linguistics, Online, pp 63–77, URL <https://aclanthology.org/2021.eacl-main.6>
- Tian B, Zhang Y, Wang J, et al (2019) Hierarchical inter-attention network for document classification with multi-task learning. In: IJCAI
- Lin Y, Zhong B, Li G, et al (2019) Localization-aware meta tracker guided with adversarial features. IEEE Access 7:99,441–99,450. <https://doi.org/10.1109/ACCESS.2019.2930550>
- Krueger DS, Maharaj T, Legg S, et al (2020) Hidden incentives for self-induced distributional shift. URL <https://openreview.net/forum?id=SJeFNHtPS>
- Bansal T, Jha R, Munkhdalai T, et al (2020) Self-supervised meta-learning for few-shot natural language classification tasks. [2009.08445](#)
- Zou Y, Lu X (2020) Gradient-em bayesian meta-learning. [2006.11764](#)
- Zintgraf L, Shiarlis K, Igl M, et al (2020) Varibad: A very good method for bayes-adaptive deep rl via meta-learning. [1910.08348](#)
- Zhou W, Li Y, Yang Y, et al (2020) Online meta-critic learning for off-policy actor-critic methods. [2003.05334](#)
- Krueger D, Maharaj T, Leike J (2020) Hidden incentives for auto-induced distributional shift. [2009.09153](#)
- Guo P, Lee CY, Ulbricht D (2020) Learning to branch for multi-task learning. In: III HD, Singh A (eds) Proceedings of the 37th International Conference on Machine Learning, Proceedings of Machine Learning Research, vol 119. PMLR, pp 3854–3863, URL <https://proceedings.mlr.press/v119/>

[guo20e.html](#)

Kim M, Pavlovic V (2020) Recursive inference for variational autoencoders. [2011.08544](#)

Kim M, Pavlovic V (2021) Reducing the amortization gap in variational autoencoders: A bayesian random function approach. [2102.03151](#)

Retyk F (2021) On meta-reinforcement learning in task distributions with varying dynamics. PhD thesis, UPC, Facultat d'Informàtica de Barcelona, Departament de Ciències de la Computació, URL <http://hdl.handle.net/2117/348143>

Ghosh A, Tschitschek S, Mahdavi H, et al (2020a) Towards deployment of robust cooperative ai agents: An algorithmic framework for learning adaptive policies. In: 19th International Conference on Autonomous Agents and MultiAgent Systems (AAMAS), Proceedings of the 19th International Conference on Autonomous Agents and MultiAgent Systems, pp 447–455, URL <http://eprints.cs.univie.ac.at/6587/>

Ghosh A, Tschitschek S, Mahdavi H, et al (2020b) Towards deployment of robust ai agents for human-machine partnerships. [1910.02330](#)

Li H, Liao X, Carin L (2009) Multi-task reinforcement learning in partially observable stochastic environments. Journal of Machine Learning Research 10(40):1131–1186. URL <http://jmlr.org/papers/v10/li09b.html>

Ye Z, Yang Y, Li X, et al (2018) An integrated transfer learning and multi-task learning approach for pharmacokinetic parameter prediction. Molecular Pharmaceutics 16(2):533–541. <https://doi.org/10.1021/acs.molpharmaceut.8b00816>, URL <http://dx.doi.org/10.1021/acs.molpharmaceut.8b00816>

Hasan MJ, Sohaib M, Kim JM (2020) A multitask-aided transfer learning-based diagnostic framework for bearings under inconsistent working conditions. Sensors 20(24). <https://doi.org/10.3390/s20247205>, URL <https://www.mdpi.com/1424-8220/20/24/7205>

Cruz JCB, Tan JA, Cheng C (2020) Localization of fake news detection via multitask transfer learning. In: Proceedings of The 12th Language Resources and Evaluation Conference. European Language Resources Association, Marseille, France, pp 2596–2604, URL <https://www.aclweb.org/anthology/2020.lrec-1.316>

Devlin J, Chang MW, Lee K, et al (2019) Bert: Pre-training of deep bidirectional transformers for language understanding. [1810.04805](#)

- Howard J, Ruder S (2018) Universal language model fine-tuning for text classification. [1801.06146](#)
- Radford A, Wu J, Child R, et al (2019) Language models are unsupervised multitask learners. OpenAI blog 1(8):9
- Dong X, Chowdhury S, Qian L, et al (2019) Deep learning for named entity recognition on chinese electronic medical records: Combining deep transfer learning with multitask bi-directional lstm rnn. PLOS ONE 14(5):1–15. <https://doi.org/10.1371/journal.pone.0216046>, URL <https://doi.org/10.1371/journal.pone.0216046>
- Taslimipoor S, Rohanian O, Ha LA (2019) Cross-lingual transfer learning and multitask learning for capturing multiword expressions. In: Proceedings of the Joint Workshop on Multiword Expressions and WordNet (MWE-WN 2019). Association for Computational Linguistics, Florence, Italy, pp 155–161, <https://doi.org/10.18653/v1/W19-5119>, URL <https://aclanthology.org/W19-5119>
- Du C, Du C, Huang L, et al (2020) Structured neural decoding with multitask transfer learning of deep neural network representations. IEEE Transactions on Neural Networks and Learning Systems pp 1–15. <https://doi.org/10.1109/TNNLS.2020.3028167>
- Krizhevsky A, Sutskever I, Hinton GE (2012) Imagenet classification with deep convolutional neural networks. In: Proceedings of the 25th International Conference on Neural Information Processing Systems - Volume 1. Curran Associates Inc., Red Hook, NY, USA, NIPS’12, p 1097–1105
- Deng J, Dong W, Socher R, et al (2009) Imagenet: A large-scale hierarchical image database. In: 2009 IEEE Conference on Computer Vision and Pattern Recognition, pp 248–255, <https://doi.org/10.1109/CVPR.2009.5206848>
- Kingma DP, Welling M (2014) Auto-encoding variational bayes. [1312.6114](#)
- Goodfellow IJ, Pouget-Abadie J, Mirza M, et al (2014) Generative adversarial networks. [1406.2661](#)
- Nguyen NV, Rigaud C, Revel A, et al (2021) Manga-mmtl: Multimodal multi-task transfer learning for manga character analysis. In: Lladós J, Lopresti D, Uchida S (eds) Document Analysis and Recognition – ICDAR 2021. Springer International Publishing, Cham, pp 410–425
- He K, Zhang X, Ren S, et al (2015) Deep residual learning for image recognition. [1512.03385](#)

- Qu Y, Baghbaderani RK, Qi H (2019) Few-shot hyperspectral image classification through multitask transfer learning. In: 2019 10th Workshop on Hyperspectral Imaging and Signal Processing: Evolution in Remote Sensing (WHISPERS), pp 1–5, <https://doi.org/10.1109/WHISPERS.2019.8920992>
- Dong NT, Khosla M (2021) A multitask transfer learning framework for novel virus-human protein interactions. bioRxiv <https://doi.org/10.1101/2021.03.25.437037>, URL <https://www.biorxiv.org/content/early/2021/03/26/2021.03.25.437037>, <https://arxiv.org/abs/https://www.biorxiv.org/content/early/2021/03/26/2021.03.25.437037.full.pdf>
- Alley EC, Khimulya G, Biswas S, et al (2019) Unified rational protein engineering with sequence-only deep representation learning. bioRxiv <https://doi.org/10.1101/589333>, URL <https://www.biorxiv.org/content/early/2019/03/26/589333>, <https://arxiv.org/abs/https://www.biorxiv.org/content/early/2019/03/26/589333.full.pdf>
- Aydin E, Erdem SEY (2019) Transfer and multitask learning using convolutional neural networks for buried wire detection from ground penetrating radar data. In: Bishop SS, Isaacs JC (eds) Detection and Sensing of Mines, Explosive Objects, and Obscured Targets XXIV, International Society for Optics and Photonics, vol 11012. SPIE, pp 259 – 270, URL <https://doi.org/10.1117/12.2518875>
- Simonyan K, Zisserman A (2015) Very deep convolutional networks for large-scale image recognition. [1409.1556](https://arxiv.org/abs/1409.1556)
- Xu Q, Yang Q (2011) A survey of transfer and multitask learning in bioinformatics. *J Comput Sci Eng* 5:257–268
- Kamath U, Liu J, Whitaker J (2019) Transfer Learning: Scenarios, Self-Taught Learning, and Multitask Learning, Springer International Publishing, Cham, pp 463–493. [https://doi.org/10.1007/978-3-030-14596-5\\_10](https://doi.org/10.1007/978-3-030-14596-5_10), URL [https://doi.org/10.1007/978-3-030-14596-5\\_10](https://doi.org/10.1007/978-3-030-14596-5_10)
- Sun S, Mao L, Dong Z, et al (2019) Multiview Transfer Learning and Multitask Learning, Springer Singapore, Singapore, pp 85–104. [https://doi.org/10.1007/978-981-13-3029-2\\_7](https://doi.org/10.1007/978-981-13-3029-2_7), URL [https://doi.org/10.1007/978-981-13-3029-2\\_7](https://doi.org/10.1007/978-981-13-3029-2_7)
- Ricci E, Yan Y, Rajagopal AK, et al (2017) Chapter 4 - exploring multitask and transfer learning algorithms for head pose estimation in dynamic multiview scenarios. In: Murino V, Cristani M, Shah S, et al (eds) Group and Crowd Behavior for Computer Vision. Academic Press, p 67–87, <https://doi.org/https://doi.org/10.1016/B978-0-12-809276-7.00005-9>, URL <https://www.sciencedirect.com/science/article/pii/B9780128092767000059>

- Wang B, Pineau J (2015) Online boosting algorithms for anytime transfer and multitask learning. *Proceedings of the AAAI Conference on Artificial Intelligence* 29(1). URL <https://ojs.aaai.org/index.php/AAAI/article/view/9607>
- Maurer A, Pontil M, Romera-Paredes B (2014) Sparse coding for multitask and transfer learning. [1209.0738](#)
- Sun Q, Liu Y, Chua TS, et al (2019) Meta-transfer learning for few-shot learning. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*
- Sun Q, Liu Y, Chen Z, et al (2020) Meta-transfer learning through hard tasks. *IEEE Transactions on Pattern Analysis and Machine Intelligence* pp 1–1. <https://doi.org/10.1109/TPAMI.2020.3018506>
- Vinyals O, Blundell C, Lillicrap T, et al (2016) Matching networks for one shot learning. In: Lee D, Sugiyama M, Luxburg U, et al (eds) *Advances in Neural Information Processing Systems*, vol 29. Curran Associates, Inc., URL <https://proceedings.neurips.cc/paper/2016/file/90e1357833654983612fb05e3ec9148c-Paper.pdf>
- Oreshkin BN, López PR, Lacoste A (2018) Tadam: Task dependent adaptive metric for improved few-shot learning. In: *NeurIPS*
- Soh JW, Cho S, Cho NI (2020) Meta-transfer learning for zero-shot super-resolution. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*
- Willard JD, Read JS, Appling AP, et al (2021) Predicting water temperature dynamics of unmonitored lakes with meta-transfer learning. *Water Resources Research* 57(7). <https://doi.org/10.1029/2021wr029579>, URL <http://dx.doi.org/10.1029/2021WR029579>
- Song W, Li S, Guo Y, et al (2020) Meta transfer learning for adaptive vehicle tracking in uav videos. In: Ro YM, Cheng WH, Kim J, et al (eds) *MultiMedia Modeling*. Springer International Publishing, Cham, pp 764–777
- Nguyen D, Nguyen K, Sridharan S, et al (2018) Meta transfer learning for facial emotion recognition. In: *2018 24th International Conference on Pattern Recognition (ICPR)*, pp 3543–3548, <https://doi.org/10.1109/ICPR.2018.8545411>
- Bastani H, Simchi-Levi D, Zhu R (2021) Meta dynamic pricing: Transfer learning across experiments. [1902.10918](#)

- Duan T, Chauhan M, Shaikh MA, et al (2021) Ultra efficient transfer learning with meta update for cross subject eeg classification. [2003.06113](#)
- Aioli F (2012) Transfer learning by kernel meta-learning. In: Guyon I, Dror G, Lemaire V, et al (eds) Proceedings of ICML Workshop on Unsupervised and Transfer Learning, Proceedings of Machine Learning Research, vol 27. PMLR, Bellevue, Washington, USA, pp 81–95, URL <https://proceedings.mlr.press/v27/aiolli12a.html>
- Tang H, Jiang G, Wang Q (2022) Deep neural network for emotion recognition based on meta-transfer learning. IEEE Access 10:78,114–78,122. <https://doi.org/10.1109/ACCESS.2022.3193768>
- Shen H, Guo B, Ding Y, et al (2022) Mdn: Meta-transfer learning method for fake news detection. In: Sun Y, Lu T, Cao B, et al (eds) Computer Supported Cooperative Work and Social Computing. Springer Nature Singapore, Singapore, pp 228–237
- Team OEL, Stooke A, Mahajan A, et al (2021) Open-ended learning leads to generally capable agents. [2107.12808](#)